


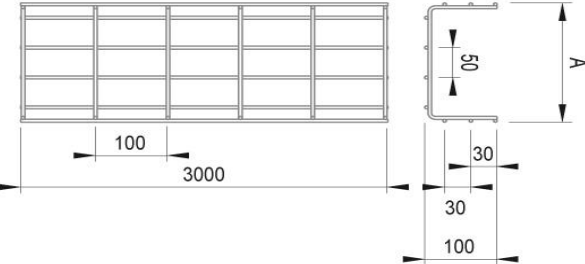

PRODUCT SPECIFICATION

AISCAN BMPI - 100

TYPE	MATERIAL	COATING	A	B	ALLOWABLE WORKING LOAD (N/m)	PACKING (meters)	<div>PLAIN</div> 
AISCAN-BMPI-1020	STAINLESS STEEL	-	200	100	671	12	
AISCAN-BMPI-1030	”	-	300	100	406	6	
AISCAN-BMPI-1040	”	-	400	100	315	6	
AISCAN-BMPI-1050	”	-	500	100	324	6	
AISCAN-BMPI-1060	”	-	600	100	306	6	
EDITION DATE	EDITION NUMBER	CARD NUMBER					
2013/10	2	EP-BMPI 100					

CHARACTERISTICS ACCORDING TO STANDARD IEC 61537:2006	
DESCRIPTION:	MESH CABLE TRAY STAINLESS STEEL.
COATING:	STAINLESS STEEL, AISI 304
MATERIAL:	METALLIC
ELECTRICAL CONTINUITY:	YES
FLAME PROPAGATE:	NO
OPERATING TEMPERATURE RANGE:	-40 °C / 150 °C
RESISTANCE TO CORROSION:	TYPE 9A
IMPACT RESISTANCE:	20 J TO -40 °C
ALLOWABLE WORKING LOAD (CTA):	DISTANCE BETWEEN SUPPORTS (1,5 METERS)

OBSERVATIONS
FOR THE UNION BETWEEN BRACKETS WILL BE REQUIRED THE USE OF 2 TO 4 SETS OF UNION (CUBS), DEPENDING THE WIDTH OF THE TRAY.
WITH ALL EDGES ROUNDED.
ACCESORIES
TRAY ATTACHMENT ASSEMBLY (CUB) UNIVERSAL MESH CABLE TRAY COVER (TUBC) OMEGA BRACKET (SO)

THE INSTALLATION OF THIS PRODUCT WILL BE CARRIED OUT ACCORDING TO THE R.E.B.T.