

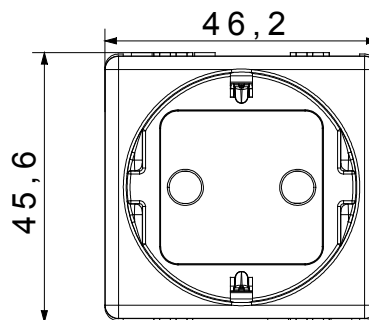


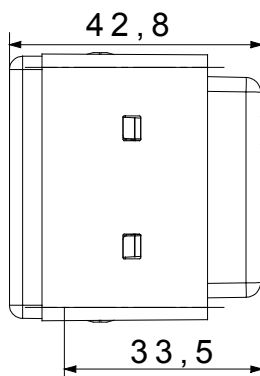

The System modular devices make it possible to create infinite combination between devices and plates, thanks to a complete range that is able to satisfy all design, functional and installation requirements. Colour and finiture: glossy white, bright and versatile  
Ideal for flush-mounting solutions (for rectangular or square boxes), surface-mounting solutions, and for special applications. The range includes commands, socket- outlets, protection, indicators, connectors and devices for the control, safety and comfort of your home.

|                                                     |                              |                                          |                                 |
|-----------------------------------------------------|------------------------------|------------------------------------------|---------------------------------|
| Categoría                                           | Base                         | Descripción                              | 2P+T - 16A                      |
| Color                                               | Blanco                       | Tensión                                  | 250 V ac                        |
| Alveolo de tierra                                   | Lateral y central            | Norma                                    | Italiana / Alemán               |
| Características                                     | Con obturadores de seguridad | Para clavijas                            | Ø 4 / 4,8 mm                    |
| Regleta de cableado                                 | De tornillo                  | Tipo                                     | P30                             |
| Norma de referencia                                 | CEI 23-50 / IEC 60884-1      | Resistencia a la tensión de prueba       | 2000 V a 50 Hz durante 1 minuto |
| Base de funcionamiento prolongado (n° de maniobras) | 10.000 a In 250 Vac cosφ=0,8 | Termopresión con bola                    | 125 °C                          |
| Prueba del hilo incandescente                       | 850 °C                       | Retención del borne en tracción al cable | > 50 N                          |
| Capacidad de apriete cable flexible (mm²)           | min. 0,75 - max. 2x4         | Capacidad de apriete cable rígido (mm²)  | min. 0,5 - max. 2x2,5           |
| N. módulos System                                   | 2                            | Material                                 | Tecnopolímero                   |
| Código Electrocod                                   | 0131                         |                                          |                                 |

### DIMENSIONAL



### SIMBOLOGÍA TÉCNICA



### MARCAS/APROBACIONES

