




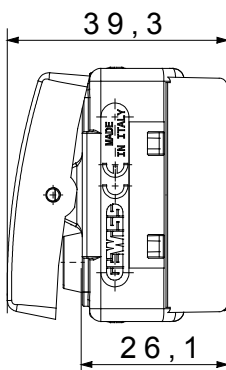

The System modular devices make it possible to create infinite combination between devices and plates, thanks to a complete range that is able to satisfy all design, functional and installation requirements. Colour and finiture: glossy white, bright and versatile  
Ideal for flush-mounting solutions (for rectangular or square boxes), surface-mounting solutions, and for special applications. The range includes commands, socket- outlets, protection, indicators, connectors and devices for the control, safety and comfort of your home.

|                                                     |                                 |                                          |                       |
|-----------------------------------------------------|---------------------------------|------------------------------------------|-----------------------|
| Categoría                                           | Conmutador                      | Tecla                                    | Neutro                |
| Símbolo                                             | -                               | Color                                    | Blanco                |
| Descripción                                         | 1P - 16AX                       | Tensión                                  | 250 V ac              |
| Unidad de señalización                              | -                               | Norma de referencia                      | EN 60669-1            |
| Resistencia a la tensión de prueba                  | 2000 V a 50 Hz durante 1 minuto | Potencia lámpara LED 230V                | 200 W                 |
| Resistencia de aislamiento                          | > 5 MOhm                        | Regleta de cableado                      | De tornillo           |
| Base de funcionamiento prolongado (n° de maniobras) | 40.000 a In 250 Vac cosφ=0,6    | Termopresión con bola                    | 125 °C                |
| Prueba del hilo incandescente                       | 850 °C                          | Retención del borne en tracción al cable | > 50 N                |
| Capacidad de apriete cable flexible (mm²)           | min. 0,75 - max. 2x4            | Capacidad de apriete cable rígido (mm²)  | min. 0,5 - max. 2x2,5 |
| N. módulos System                                   | 1                               | Material                                 | Tecnopolímero         |
| Código Electrocod                                   | 0130                            |                                          |                       |

### DIMENSIONAL



### SIMBOLOGÍA TÉCNICA



### MARCAS/APROBACIONES

