


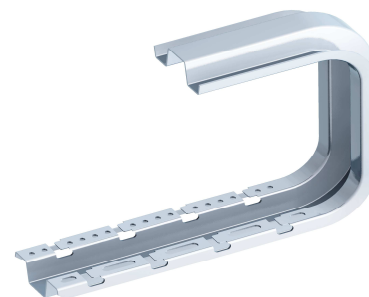

PRODUCT SPECIFICATION

"U" MULTIFUNCTION OMEGA BRACKET (HIGH RESISTANCE)

TYPE	MATERIAL	COATING	A	ALLOWABLE WORKING LOAD (N/m)	PACKING (Units)	PLAIN
						
AISCAN-SOUMA10	METALLIC	ZINC/ALUMINIUM/ MAGNESIUM	100	491	4	
AISCAN-SOUMA15	"	"	150	706	4	
AISCAN-SOUMA20	"	"	200	573	4	
AISCAN-SOUMA30	"	"	300	428	4	
EDITION DATE	EDITION NUMBER	DOCUMENT ID.				
2016/04	1	EP - SOUMA				

CHARACTERISTICS ACCORDING TO STANDARD IEC 61537:2007

DESCRIPTION:	HIGH RESISTANCE "U" MULTIFUNCTION OMEGA BRACKET
COATING:	SENDZIMIR GALVANISED "MAGNELIS ZM175"
MATERIAL:	METALLIC
ELECTRICAL CONTINUITY:	YES
FLAME PROPAGATE:	NO
OPERATING TEMPERATURE RANGE:	-40 °C / 150 °C
RESISTANCE TO CORROSION:	TYPE 8
IMPACT RESISTANCE:	20 J TO -40 °C

OBSERVATIONS

THE INSTALLATION OF THIS PRODUCT
WILL BE CARRIED OUT ACCORDING TO
THE R.E.B.T.